




## Bearing company

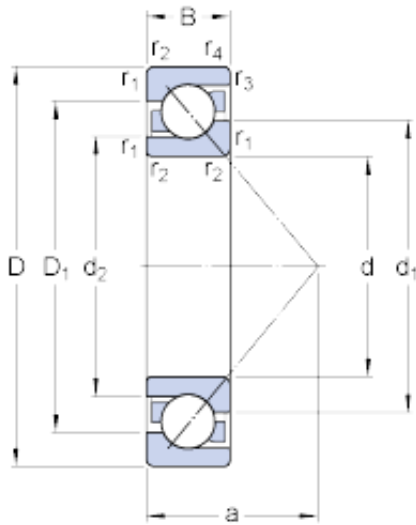

7304 bep Bearing 2D drawings and 3D CAD models

20 mm x 52 mm x 15 mm skf 7304 bep bearing

Bearing No. 7304 bep

Size	52x20x15 mm
Bore Diameter	52 mm
Outer Diameter	20 mm
Width	15 mm
d	20 mm
D	52 mm
B	15 mm
d <sub>1</sub>	33.15 mm
d <sub>2</sub>	26.75 mm
D <sub>1</sub>	40.5 mm
a	22.8 mm
r <sub>1,2</sub> - min.	1.1 mm
r <sub>3,4</sub> - min.	0.6 mm
d <sub>a</sub> - min.	27 mm
D <sub>a</sub> - max.	45 mm
D <sub>b</sub> - max.	47.8 mm
r <sub>a</sub> - max.	1 mm
r <sub>b</sub> - max.	0.6 mm
Basic dynamic load rating - C	17.4 kN
Basic static load rating - C <sub>0</sub>	9.5 kN
Fatigue load limit - P <sub>u</sub>	0.4 kN
Reference speed	16000 r/min
Limiting speed	16000 r/min
Calculation factor - k <sub>r</sub>	0.1
Calculation factor - k <sub>a</sub>	1.6



## Bearing company

Calculation factor - e	1.14
Calculation factor - X	0.57
Calculation factor - Y <sub>0</sub>	0.52
Calculation factor - Y <sub>1</sub>	0.55
Calculation factor - Y <sub>2</sub>	0.93
Calculation factor - X	0.35
Calculation factor - Y <sub>0</sub>	0.26
Calculation factor - Y <sub>1</sub>	
Calculation factor - Y <sub>2</sub>	0.57
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.143
EAN	7316576633751
Product Group	B00308
Enclosure	Open
Flush Ground	No
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3   ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Polymer
Contact Angle	40 Degree
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Inch - Metric	Metric
Long Description	20MM Bore; 52MM Outside Diameter; 15MM



## Bearing company

	Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3   ISO P6; No Filling Slot; No Snap Ring
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing
Keyword String	Angular Contact
Manufacturer URL	<a href="http://www.skf.com">http://www.skf.com</a>
Manufacturer Item Number	7304 BEP
Weight / LBS	0.3
Bore	0.787 Inch   20 Millimeter
Width	0.591 Inch   15 Millimeter
Outside Diameter	2.047 Inch   52 Millimeter
bore diameter:	20 mm
radial static load capacity:	9.5 kN
outside diameter:	52 mm
cage material:	Nylon
overall width:	15 mm
outer ring width:	15 mm
contact angle:	40 °
maximum rpm:	16000 RPM
row type & fill slot:	Single-Row Non-Fill Slot
finish/coating:	Uncoated
internal clearance:	C0
precision rating:	Not Rated
closure type:	Open
fillet radius:	1 mm
radial dynamic load capacity:	17.4 kN
series:	73



## Bearing company

$d_1$	33.15 mm
$d_2$	26.75 mm
$D_1$	40.5 mm
$r_{1,2}$ min.	1.1 mm
$r_{3,4}$ min.	0.6 mm
$d_a$ min.	27 mm
$D_a$ max.	45 mm
$D_b$ max.	47.8 mm
$r_a$ max.	1 mm
$r_b$ max.	0.6 mm
Basic dynamic load rating C	17.4 kN
Basic static load rating $C_0$	9.5 kN
Fatigue load limit $P_u$	0.4 kN
Calculation factor A	0.00191
Calculation factor $k_r$	0.1
Calculation factor e	1.14
Calculation factor X	0.35
Calculation factor $Y_0$	0.26
Calculation factor $Y_2$	0.57
Calculation factor X	0.57
Calculation factor $Y_0$	0.52
Calculation factor $Y_1$	0.55
Calculation factor $Y_2$	0.93
Mass bearing	0.14 kg