




Bearing company

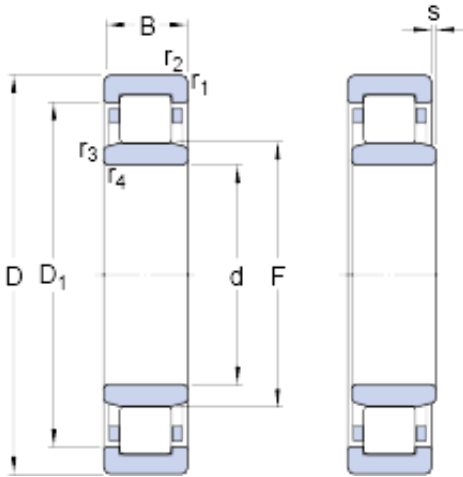

55 mm x 100 mm x 21 mm skf nu 211 ecp bearing

Bearing No. nu 211 ecp

nu 211 ecp Bearing 2D drawings and 3D CAD models

Size	100x55x21 mm
Bore Diameter	100 mm
Outer Diameter	55 mm
Width	21 mm
d	55 mm
D	100 mm
B	21 mm
D ₁	85.6 mm
F	66 mm
r _{1,2} - min.	1.5 mm
r _{3,4} - min.	1.1 mm
s	1 mm
d _a - min.	62 mm
d _a - max.	64 mm
d _b - min.	68 mm
D _a - max.	91.4 mm
r _a - max.	1.5 mm
r _b - max.	1 mm
Basic dynamic load rating - C	96.5 kN
Basic static load rating - C ₀	95 kN
Fatigue load limit - P _u	12.2 kN
Reference speed	7500 r/min
Limiting speed	8000 r/min
Calculation factor - k _r	0.15



Bearing company

Category	Cylindrical Roller Bearings
Inventory	3.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.68
EAN	7316577028310
Product Group	B04144
Bore Profile	Straight
Cage Material	Polymer
Precision Class	RBEC 1 ISO P0
Number of Rows of Rollers	Single Row
Separable	Inner Ring - Both Sides
Rolling Element	Cylindrical Roller Bearing
Profile	Complete with Outer and Inner Ring
Snap Ring	No
Internal Clearance	C0-Medium
Retainer	Yes
Relubricatable	Yes
Inch - Metric	Metric
Other Features	High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID
Long Description	55MM Bore; Straight Bore Profile; 100MM Outside Diameter; 21MM Width; Polymer Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium In
Category	Cylindrical Roller Bearing
UNSPSC	31171547
Harmonized Tariff Code	8482.50.00.00
Noun	Bearing



Bearing company

Manufacturer URL	http://www.skf.com
Manufacturer Item Number	NU 211 ECP
Weight / LBS	1.497
Width	0.827 Inch 21 Millimeter
Outside Diameter	3.937 Inch 100 Millimeter
Bore	2.165 Inch 55 Millimeter
bore diameter:	55 mm
precision rating:	RBEC 1 (ISO Class Normal)
outside diameter:	100 mm
maximum rpm:	8000 RPM
overall width:	21 mm
bearing material:	Steel
flanges:	(2) Outer Ring
cage material:	Polyamide
bore type:	Straight
finish/coating:	Uncoated
number of rows:	1
closure type:	Open
internal clearance:	C0
application:	Piston Type Machines, Rolling Mills, Spindles/Machine Tools
ring separation:	Separable Ring
outer ring width:	21 mm
operating temperature range:	Maximum of +300 ° F
fillet radius:	1.5 mm
dynamic load capacity:	96.5 kN
series:	NU2
static load capacity:	95 kN
D ₁	85.6 mm
r _{1,2} min.	1.5 mm



Bearing company

$r_{3,4}$ min.	1.1 mm
s max.	1 mm
d_a min.	62 mm
d_a max.	64 mm
d_b min.	68 mm
D_a max.	91.4 mm
r_a max.	1.5 mm
r_b max.	1 mm
Basic dynamic load rating C	96.5 kN
Basic static load rating C_0	95 kN
Fatigue load limit P_u	12.2 kN
Calculation factor k_r	0.15
Limiting value e	0.2
Axial load factor Y	0.6
Mass bearing	0.66 kg
Angle ring	HJ 211 EC